
$\label{eq:A} A = \mbox{height from floor to chimney connection upwards} \\ B = \mbox{height from floor to ci/c chimney connection rear} \\ C = \mbox{height from floor to lower edge of hatch} \\ D = \mbox{height from floor to lower edge of hatch} \\ E = \mbox{minimum height to sloped ceiling from the centre of the chimney} \\$ Max. log length: 33 cm

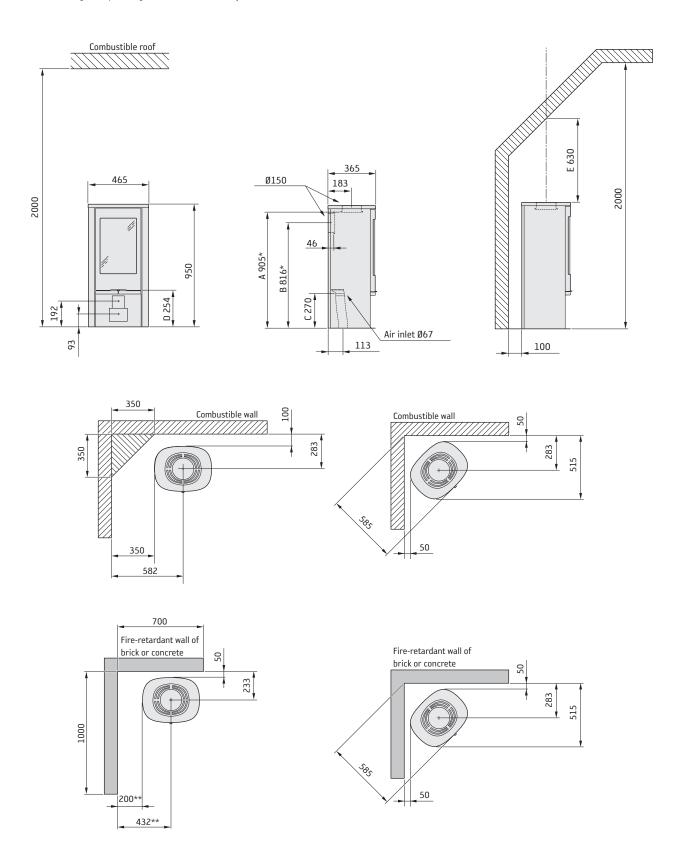

If the stove is placed on a floor protector hearth plate made of glass for example (accessory option), the height from the floor will be increased by the thickness of the hearth plate; for a freestanding glass hearth plate this will be 10 mm.
To prevent discolouration of painted non-combustible walls, we recommend the same safety spacing as for a combustible wall.